
Fan Coil Applications

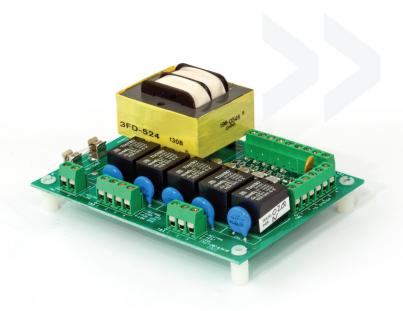


CCC Series

Relay Interface Board

The Relay Interface Board is ideal for fan coil applications where 240/120 Vac equipment must be controlled by a 24Vac thermostat controller. This simple to install interface isolates the low and high voltages through multiple relays.

It complements the Neptronic® family of products which includes electronic actuators and actuated valves, electric duct heaters and other controls.

Typical Application

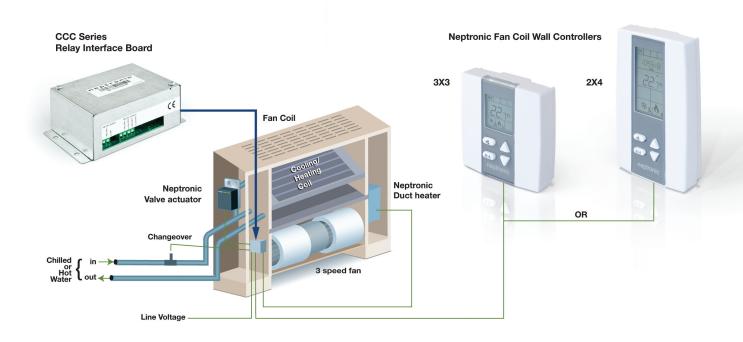



Models



PCB	only (120 VAC)
Model No.	Description
CCC013-07	3 contacts, 7 Amps
CCC014-07	4 contacts, 7 Amps
CCC015-07	5 contacts, 7 Amps
Contro	l board (240 VAC)
CC023-07	3 Contacts, 7 Amps
CC024-07	4 Contacts, 7 Amps
CC025-07	5 Contacts, 7 Amps



In m	etal box (120 VAC)
Model No.	Description
CCC713-07	3 contacts, 7 Amps
CCC714-07	4 contacts, 7 Amps
CCC715-07	5 contacts, 7 Amps
Control boa	rd In metal box (240 VAC)
CCC723-07	3 Contacts, 7 Amps
CCC724-07	4 Contacts, 7 Amps
CCC725-07	5 Contacts, 7 Amps

Features

- 240/120 Vac
- 3, 4 or 5 contacts, 7A
- Metal box with secure 4-point mounting
- Easy to install
- LED indication of relay status
- Fused 240/120 Vac & 24Vac circuits

Features

Contact rating	7 Amps / 120 or 240 vac

Outputs	Up to 5 on/off contact outputs
---------	--------------------------------

120 or 240 VAC

Power supply 110 to 130 vac or 220 to 240 vac

50/60Hz

Power outputs 24 vac / 0.5A, 12 va max.

Electrical connection 0.8 mm2 / 18 AWG minimum

Operating temperature 0°C to +50°C / 32°F to +122°F

Storage temperature -30°C to +50°C / -22°F to +122°F

Relative humidity 5 to 95 % non condensing

Weight 400 g. / 0.9 lb

Dimensions

