

Duplex Water Softener

Flow Range from 3 to 40 GPM

Description

Water softener filters are used to remove the hard water minerals responsible for scaling in humidifiers and other water appliances. This type of filtration greatly prolongs the life of the reverse osmosis membranes since salts are very soluble and easy to wash away. The reinforced composite reservoir is filled from the top with resin beads to perform the exchange of ions. Water is circulated through the media by an automatic programmable head that takes care of filtering and backwash regeneration. After saturating the media with carbonates, the regeneration cycle washes away the scaling minerals with brine taken from the salt reserve. The best-in class control head can be programmed with several modes for the regeneration schedule and be equipped with a flow meter to monitor water consumption. The head is plugged on a 120VAC typical circuit and features a backup coin cell for up to 8h of operation. Twin softeners are equipped with two tanks to provide continuous treatment. The control head monitors the resin capacity and will start the regeneration cycle on one of the tanks, while the other takes over the softening process, insuring continuous supply.



Model Specifications

Part Number	Nominal Size [cu.ft]	Media Volume [cu.ft]	Tank Dimensions Dia. x H [in]	Flow Rate* [GPM]
WS DWS01	1	0.75	10 x 44	3.75
WS DWS02	2	1.75	10 x 54	7.5
WS DWS03	3	2	12 x 52	10
WS DWS04	4	3	14 x 65	15
WS DWS05	5	4	16 x 65	20
WS DWS07	7	6	21 x 62	30
WS DWS10	10	8	24 x 72	40


*Flow rates are based on a concentration of 12gr/GAL of hardness.

General Technical Specifications

Description	
Material	Tank: Fiberglass reinforced Composite Media: Cation Resin Brine Tank: Polymer
Operating pressure (Min/Max)	25psi – 125psi
Operating temperature (Min/Max)	40°F (5°C) – 100°F (38°C)
Voltage and Power	120VAC/60Hz – 10W




Dimensions

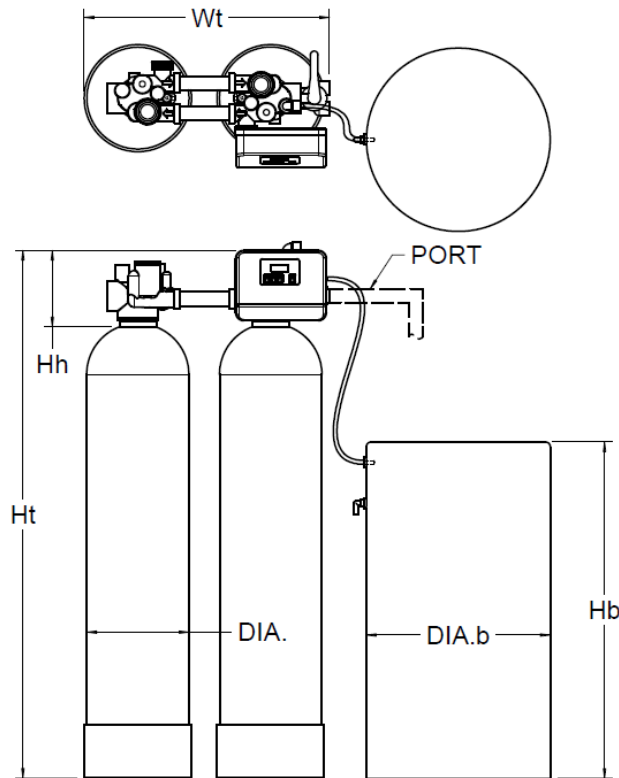

Part Number	Softener						Brine Tank			
	DIA. [in]	Ht [in]	Hh [in]	Wt [in]	Dry Weight [lb]	Port Size	DIA.b [in]	Hb [in]	Dry Weight [lb]	Service Weight [lb]
WS DWS01	10	54	7.5	23	265	1"NPT	18	40	30	340
WS DWS02	10	64	7.5	23	265	1"NPT	18	40	30	340
WS DWS03	12	62	7.5	27	340	1"NPT	18	40	30	340
WS DWS04	14	75	7.5	31	610	1"NPT	24	42	40	620
WS DWS05	16	75	7.5	35	705	1"NPT	24	42	40	620
WS DWS07	21	72	10.75	45	1185	1.5"NPT	30	48	45	1100
WS DWS10	24	82	10.75	51	1760	2"NPT	39	48	50	1850

Accessories

Part Number	Description
WS SCR1	Softener Cation Resin Replacement Media, 1 bag of 1cuft
WS SS1	Water Softener Salt Crystal, 1 bag of 0.5cuft, to reload the brine tank.



Cartridge Water Softener

Flow Range up to 4GPM

Description

Cartridges are used to convert the hardness minerals to an inactive crystal form. While not filtering them out of the feed water, the different shape of the mineral reduces the ability to stick to membrane. This type of filtration greatly prolongs the life of the reverse osmosis membranes.

Smaller RO systems can be equipped with cartridge-based filtration, with no control, refill or maintenance required during the life span of the filter. Filters cartridges are replaced every year. This offers a more compact water pre-treatment setup than a duplex tank, with quicker and easier maintenance of the filters.



Model Specifications

Part Number	Nom. Diameter	Nom. Length	Max Flow Rate [GPM]	Life Span [Months]	Ports Size	Replacement Cartridge
WS SCF412-1	4in	12in	1	12	1/2 FNPT	WS SCR412-1
WS SCF424-2	4in	24in	2			WS SCR424-2
WS SCF824-4	8in	24in	4		3/4 FNPT	WS SCR824-4

General Technical Specifications

Description	Min	Max
Pressure	25psi	90psi
Temperature	40°F (5°C)	100°F (38°C)
Filtration Pore Size	10 µm	-
Hardness (CaCO ₃)	-	500ppm 30grain/gal.
TDS	-	1500ppm
PH	6.5	8.5