




TRO5404

The TRO5404 room controller has been designed for general HVAC applications such as variable air volume (VAV) systems. This modern controller can connect up to 5 outputs at one time:

- Damper actuator or actuated valve
- Electric duct heater (modulating or pulsed)
- Pulsed baseboard
- SSRs or SCRs

The TRO5404 is a low voltage (24 VAC), fully programmable controller. It complements the Neptronic® family of products which includes electronic actuators and actuated valves, electric duct heaters and other controls.

Typical Application

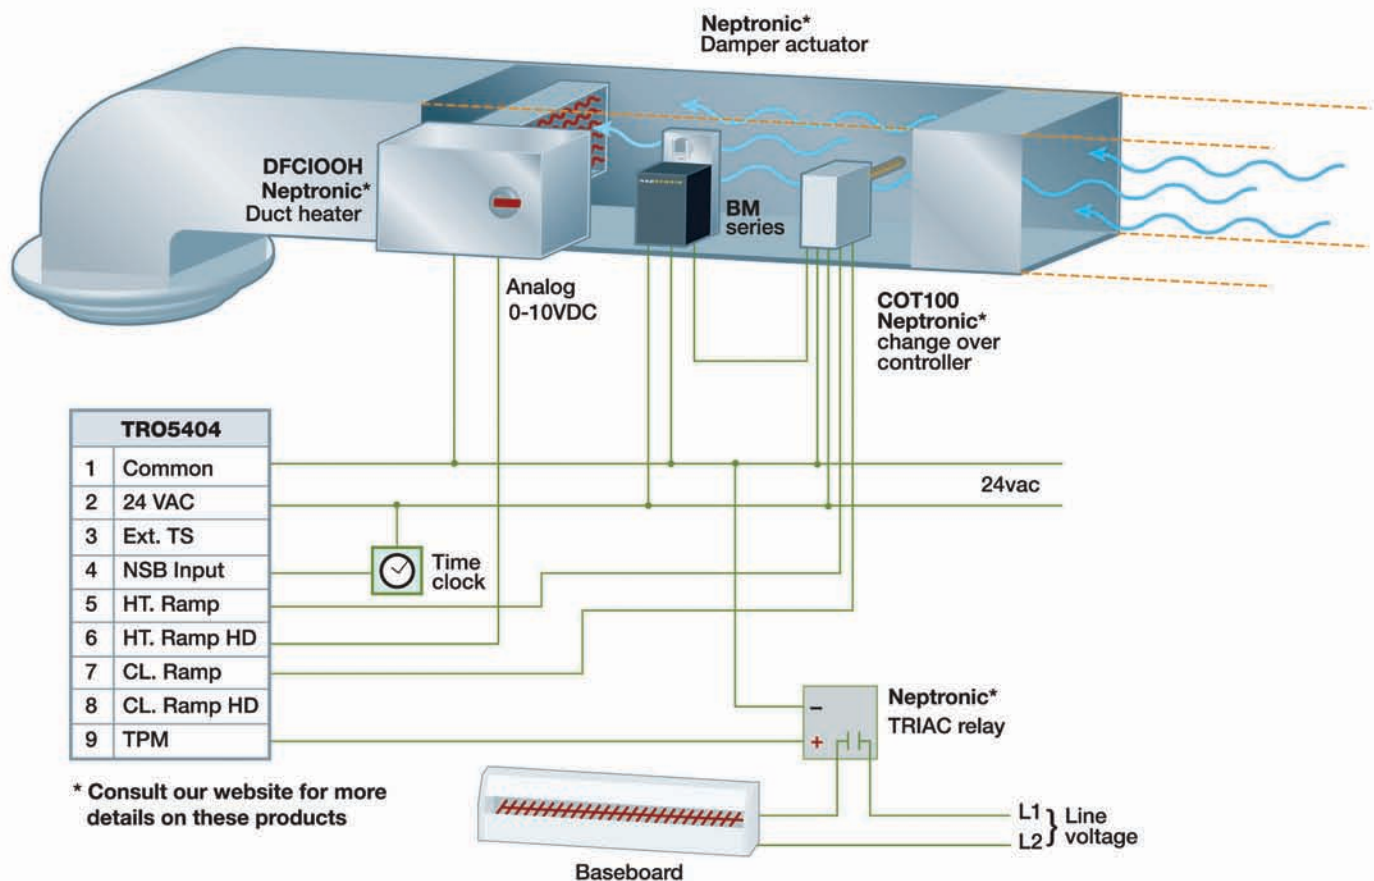




neptronic®

Features

- Main supply 24VAC
- 2 Analog cooling outputs (0-10VDC)
- 2 Analog heating outputs (0-10VDC)
- TPM output (time proportional output)
- Manual Night Set Back (NSB) override
- NSB for cooling and heating fully adjustable
- Multi-level lockable access menu
- Lockable set point
- Lockable function (cool and heat, cool only, heat only, off)
- Fahrenheit or Celsius
- External sensor input
- Offset for temperature reading adjustment
- Selectable control band

Display

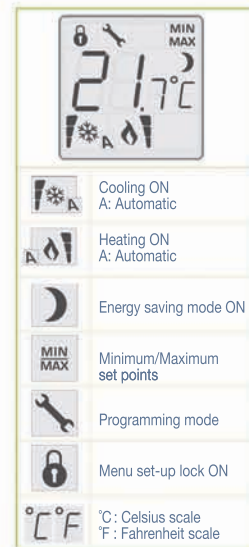

Specifications

Temperature Range	10°C - 35°C / 50°F - 95°F
NSB Temperature Range	Cooling 22°C - 35°C / 72°F - 95°F Heating 10°C - 22°C / 50°F - 72°F
Weight	85 g / 0.2 Lbs
Scale	°C / °F
Color	White
Accuracy	±0.2°C/ ±0.4°F
Flammability	UL94V-0
Ext. Temperature Input	Thermistor 3.3K or 10K
Output	2 Analog cooling outputs (0-10VDC) 2 Analog heating outputs (0-10VDC) tpm, (time proportional)

Dimensions

